

CONSEW *Since 1898*®

Model
2206RB-14-7DD




INSTRUCTION MANUAL

CONSEW USA / JAPAN

2206 RB-14-7



Safety Instruction

1. Users are required to read the operation manual completely and carefully before installation or operation.
 2. All the instruction marked with sign  must be observed or executed; otherwise, bodily injuries might occur.
 3. The product should be installed and pre-operated by well trained persons.
 4. For perfect operation and safety, it is prohibited that using extension cable, with multi-outlet for power connection.
 5. When connecting power supply cords to power sources, it is necessary to make sure that the power voltage is lower than 250 VAC and matches the rated voltage indicated on the motor's name plate.
- ※ Attention: If the Control Box is AC 220V system, please don't connect the Control Box to AC 380V power outlet. Otherwise, the error will occur and motor will not work. If that happens, please turn off the power immediately and check the power voltage.
6. Don't operate in direct sun light, outdoors area and where the room temperature is over 45°C or below 5°C.
 7. Please avoid operating near the heater at dew area or at the humidity below 30% or above 95%.
 8. Don't operate in area with heavy dust, corrosive substance or volatile gas.
 9. Avoid power cord being applied by heavy objects or excessive force, or over bend.
 10. The earth wire of power cord must be connected to the system ground of the production plant by proper size of conductions and terminals. This connection should be fixed permanently.
 11. All the moving portions must be prevented to be exposed by the parts provided.
 12. Turing on the machine in the first time, operate the sewing machine at low speed and check the correct rotation direction.
 13. Turn off the power before the following operation:
 - a) Connecting or disconnecting any connectors on the control box or motor.
 - b) Threading needle.
 - c) Raising the machine head.
 - d) Repairing or doing any mechanical adjustment.
 - e) Machines idling.
 14. Repairs and high level maintenance work should only be carried out by electronic technicians with appropriate training.
 15. All the spare parts for repair must be provided or approved by the manufacturer.
 16. Don't use any objects or force to hit or ram the product.

Guarantee Time

Warranty period of this product is 1 year dated from purchasing, or within 2 years from ex-factory date.

Warranty Detail:

Any trouble found within warranty period under normal operation, it will be repaired free of charge. However, maintenance cost will be charged in the following cases even if within warranty period:







1. Inappropriate use, including: wrong connecting high voltage, wrong application, disassemble, repair, modification by incompetent personnel, or operation without the precaution, or operation out of its specification range, or inserting other objects or liquids into the product.
2. Damage by fire, Earth quake, lighting, wind, flood, salt corrosive, moisture, abnormal power voltage and any other damage cause by the natural disaster or by the inappropriate environments.
3. Dropping after purchasing or damage in transportation by customer himself or by customer's shipping agency

Note: We make our best effort to test and manufacture the product for assuring the quality. However, it is possible that this product can be damaged due to external magnetic interference and electronic static or noise or unstable power source more than expected; therefore the grounding system of operate area must guarantee the good earth and it's also recommended to install a failsafe device. (Such as residual current breaker)

1 Button Displays and operating instructions











1.1 Key Description

Name	key	Indicate	Icons
Start/End Back-Tacking Selection		Execution starting back seam B segment or execution starting back seam (A, B segment) Execution starting back seam (A, B segment) 2 times	
		Execution terminates back seam C segment or execution terminates back seam (C, D segment) Execution terminates back seam (C, D segment) 2 times	
Freedom sewing shortcuts		As the treadle is toed down, machine will start sewing. Once the treadle returns to neutral, machine will stop immediately. As the treadle is heeled back, machine will automatically start trimming cycle.	
Continuous back seam shortcuts		Once the treadle is toed down, all the seams of Bar-Tacking will be completed with D times, and then the thread will automatically be trimmed. Note: When the Bar-Tacking Sewing starts, will not stop until the trimming cycle finished, except for the treadle heeled back to cancel the action.	
Some fixed stitch shortcuts		As the treadle is toed down, Constant-Stitch Sewing E, F, G or H performs section by section. Once the treadle returns to neutral intermediately in any section, machine will stop immediately. When the treadle is toed down again, the balance stitches of E, F, G or H goes on. The key adjustable four, seven-segment, eight, and other multi-sew sewing patterns. When the display P1 ~ PF press [S] key to confirm the changes multistage sewing patterns P1 ~ PF is appropriate to modify the number of segment, the latter two is to modify the segment pin number.	
Multi-set stitch shortcuts			
Enter and determine \ save button		Enter parameter values such items and their contents change after adjustment, need to press the [S] key to save the confirmation. Note: The parameters are saved directly by the [S] key.	
Mention needles / fill needle key		Continuous back seam except, any kind of sewing stop, click for lifting the needle or forward fill half needle. Any kind of sewn termination is not tangent, click for lifting the needle or forward fill half needle.	
Automatically trigger button		1. In Free sewing: One touch of this key makes beep sound without any function also LED does not light up. 2. In Constant-Stitch Sewing: One shot to the pedal, stitches number of E, F, G or H will be automatically performed. Toe down the pedal again and again to finish the rest sections until it finish pattern.	
Tangent line function keys		1. Set or cancel the use of the tangent function. 2. The corresponding icon is not lit, turn off the corresponding functions.	
Function key enter parameter area		Under normal mode, press the [P] key to enter the user parameter mode Press and hold the [P] key to boot into parameter mode Technician	
Set value increment / parameter increment key		1. A, B, C, D, E, F, G, H section, increase the number of setting stitch. 2. Increase the parameter in Parameter selection. 3. Increase the setting value in Parameter value.	
Set value decrement / decrement key parameters		1. A, B, C, D, E, F, G, H decrease the number of setting stitch 2. Decrease the parameter in Parameter selection. 3. Decrease the setting value in Parameter value.	
Needle stop up and down keys		1. LED ON indicate stopping machine at the upper stop needle position. 2. LED ON indicate stopping machine at the lower stop needle position.	
Presser foot shortcuts		1. LED ON=Presser Foot automatically goes up after trimming. 2. LED ON=Presser Foot automatically goes up after motor stops. 3. Two icons are both LED ON= Presser Foot automatically goes up after trimming and motor stops. 4. Two icons are both LED OFF=Presser Foot is inactive.	


























Slow play seam shortcuts		1. The corresponding icon lights, slow starting sewing open. 2. The corresponding icon is not lit, no slow-starting sewing function.	
Clamp function keys		1. The corresponding icon lights, thread nipper function is turned on. 2. The corresponding icon is not lit, no thread nipper function.	
Maximum speed setting key		Speed up key: the speed should not lower than the value set by technician	
		Slow down key: the minimum speed is 200r/m	

1.2 Comparison Table of LCD Display Fonts and Actual Fonts



Arabic Numerals:

Actual	0	1	2	3	4	5	6	7	8	9
Display										


English Alphabet

Actual	A	B	C	D	E	F	G	H	I	J
Display										
Actual	K	L	M	N	O	P	Q	R	S	T
Display										
Actual	U	V	W	X	Y	Z				
Display										

1.3 Manually adjust the positioning










Press and hold the **[S]** key to boot into the needle position P72 term correction parameters



Enter the parameter content, the hand wheel adjustment supreme needle position (parameter will change with the hand wheel position), the **[S]** key to save the parameters (after saving, under the needle position will be automatically adjusted accordingly), the key **[P]** to exit without saving the parameters.

1.4 Restore factory settings

Hold down the left two **[-]** key to boot

Double-click the **[S]** key to confirm it, shutdown restart

2 user parameter & technician parameter

Parameter	Parameter Function	Range	Default	Key	Description
In the normal screen, press [P]					
P01	Maximum Sewing Speed (r/S)	100-3700	2200	+ -	Maximum speed of machine sewing
F02	Speed Curve Adjustment (%)	1-100	80	+ -	The Lager the value, the faster to increase speed
P03	Needle UP/ DOWN	UP/DN	DN	+ -	UP: Needle Stops at Up Position DN: Needle Stops at Down Position
P04	Start Back-Tacking Speed (r/S)	200-3200	1200	+ -	Start Back-Tacking Speed Adjustment
P05	End Back-Tacking Speed (r/S)	200-3200	1200	+ -	End Back-Tacking Speed Adjustment
P06	Bar-Tacking Speed (r/S)	200-3200	1200	+ -	Repeat Bar-Tacking Speed Adjustment
P07	Soft Start Speed (r/S)	200-1500	400	+ -	Soft Start Speed Adjustment
P08	Stitch Numbers for Soft Start	0-99	2	+ -	Soft Start Stitches Setting (one unit = half stitch)
P09	Automatic Constant-Stitch Sewing Speed (r/S)	200-4000	2200	+ -	Constant-Stitch sewing speed 【034.SMP】 is set at A (or when one shot signal is active)
P10	Automatic End Back-Tacking Sewing (Can invalidate the stitch correction function)	ON/OFF	ON	+ -	The Stitch-Correction is valid in sewing stop. Note: Valid only when the 【0.11.RVM】 must set on B ON: Invalid (Constant-Stitch sewing, it can automatic continue action as CD function) OFF: Valid (Can't continue execute CD function)
P11	Back-Tacking Mode Selection	J/B	J	+ -	J: JUKI Mode (it will activate when machine is stopped or running) B: BROTHER Mode (It will activate only the machine is running)
P12	Start Back-Tacking Mode Selection	A/M	A	+ -	A: One shot to pedal, it will automatic execute Start Back-Tacking. M: Pedal-controlled and motor can stop arbitrarily
P13	Mode Selection at the end of Start Back-Tacking	CON/STP	CON	+ -	CON: At the end of Start Back-Tacking, machine continues sewing if pedal pressed or START signal on (standing operation) STP: At the end of Start Back-Tacking, machine stops
P14	Soft Start	ON/OFF	OFF	+ -	ON: Slow start feature is turned on. OFF: Slow start function off.
P15	Make up pin mode	0-2	0	+ -	0: Semi-pin; 1: a pin
P16	Setting Stitches B of Start Back-Tacking			+ -	Reserve; set here invalid
P17	Setting Turns of Start Back-Tacking			+ -	Reserve; set here invalid
P18	Stitch Balance for Start Back-Tacking 1	0-200	138	+ -	0 → 200 Action gradually lag
P19	Stitch Balance for Start Back-Tacking 2		153	+ -	
P20	Mode Selection for End Back-Tacking	A/M	A	+ -	A: Pedal full heeling, it will automatic execute end Back-Tacking M: Pedal-controlled and motor can stop arbitrarily
P21	End Back-Tacking Function Selection	ON/OFF	ON	+ -	ON: termination feature is turned back seam OFF: End back seam is off Quick Setup from the front, where the setting is invalid
P22	Setting Stitches C of End Back-Tacking			+ -	【End Back-Tacking】 C, D segment pin count set Quick Setup from the front, where the setting is invalid
P23	Setting Stitches D of End Back-Tacking			+ -	
P24	Anti-pedaling pedals points; voltage	30-1000	110	+ -	
P25	Stitch Balance for End Back-Tacking 3	0-200	138	+ -	0 → 200 Action gradually lag
P26	Stitch Balance for End Back-Tacking 4		153	+ -	

Parameter	Parameter Function	Range	Default	Key	Description	
P27	Adding 1 Stitch to C Segment of End Back-Tacking	0-1	1	+	-	1: Thin materials 0 : Thick materials
P28	Mode Selection for Bar-Tacking	A/M	A	+	-	Bar-Tacking, reverse solenoid action: A: One shot to pedal, it will automatic execute Bar-Tacking. M: Pedal-controlled and motor can stop arbitrarily
P29	Tangent after braking force	1-50	23	+	-	
P30	Thick material afterburner	0-100	0	+	-	
P31	Shear line afterburner	0-100	60	+	-	
P32	Stitch Balance for Bar-Tacking 5	0-200	138	+	-	0 → 200 Action gradually lag
P33	Stitch Balance for Bar-Tacking 6		153	+	-	
P34	Mode Selection for Constant-Stitch Sewing	A/M	A	+	-	A: One shot to pedal, it will automatic execute Constant-Stitch M: Pedal-controlled and motor can stop arbitrarily
P35	Constant-Stitch Sewing Function Selection	ON/OFF	OFF	+	-	Reserve; set here invalid
P36	Setting Stitches for Section P1 of Constant-Stitch Sewing		0	+	-	Reserve; set here invalid
P37	Wiper Function Selection or Thread Clamp Pressure Setting	0-11	8	+	-	0 : No Action 1: Wiper Action 2-11: Thread Clamp action and the pressure gradually increased)
P38	Trimmer Function Selection	ON/OFF	ON	+	-	ON: Trimmer Valid OFF: Trimmer Invalid
P39	Presser Foot UP / Down a intermediate stop	UP/DN	DN	+	-	UP: Presser foot goes up automatically DN: Presser foot keeps down (Controlled by heeling pedal)
P40	Presser Foot UP / Down after Trimming	UP/DN	DN	+	-	UP: Presser foot goes up automatically DN: Presser foot keeps down (Controlled by heeling pedal)
P41	Display the sewing finished quantity		0	+	-	Counting the finished-sewing quantity
P42	Information Display		N01	+	-	No1 Electrically controlled version serial numbers NO2 Selected needle cassette version NO3 Speed NO4 Pedals AD, NO5 Positioning angle (0--359), NO6 Under the positioning angle NO7 Bus voltage AD
P43	Setting Direction of Motor Rotation	CCW/CW	CCW	+	-	CW: Clockwise CCW: Counter Clockwise
Press and hold the [P] key to boot						
P44	Brake force	1-50	18	+	-	Efforts to stop the machine when selecting
P45	Back-seam operation duty cycle (%)	10-90	25	+	-	Back-seam action to periodic power output
P46	Motor stops with a reverse angle after trimming	ON/OFF	OFF	+	-	ON: It will automatic as reverse function after trimming (angle adjustment according to the parameter 【047.TR8】 OFF: No Function
P47	Adjustment of reverse angles after trimming	50-200	160	+	-	Adjusting at reverse direction after trimming
P48	Low (Positioning) Speed (r/S)	100-500	210	+	-	Setting Positioning Speed
P49	Trimming Speed (r/S)	100-500	250	+	-	Adjusting trimming speed


Parameter	Parameter Function	Range	Default	Key	Description
P50	The time of Foot lifting	10-990	250	⊕ ⊖	Adjustment of foot lifting action
P51	Duty-Cycle Setting for Foot Lifter (%)	10-90	25	⊕ ⊖	Adjustment for Duty-Cycle of Foot Lifter / Back-Tacking (Fine tuning can reduce the over-heating)
P52	The time of Foot down	10-990	120	⊕ ⊖	Adjustment of foot down action
P53	Cancel Foot Lifting when Half-Heeling the Pedal	ON/OFF	OFF	⊕ ⊖	ON: Pedal half heeling without foot lifting function. OFF: Pedal half heeling with foot lifting function
P54	Trimming Time (ms)	10-990	200	⊕ ⊖	Trimming sequence time setting
P55	Setting Wiper Timing	10-990	270	⊕ ⊖	Wiper sequence setting
P56	Needles Goes Up Automatically as Power turned on	ON/OFF	ON	⊕ ⊖	ON: Power turned on, needle goes up position automatically OFF: No Function.
P57	Protection time for foot lifter (S)	1-120	10	⊕ ⊖	It will automatic come down when foot lifter keep lift over the setting time.
P58	Up Position Adjustment	0-1439	40	⊕ ⊖	Up Position Adjustment The needle will advance stop when the value decreased. The needle will delay stop when the value increased.
P59	Down Position Adjustment	0-1439	750	⊕ ⊖	Down Position Adjustment The needle will advance stop when the value decreased. The needle will delay stop when the value increased.
P60	Testing Speed (r/S)	100-3700	2200	⊕ ⊖	Setting testing speed.
P61	Testing A		OFF	⊕ ⊖	Option of Testing A, after setting press 【060. Tv】 to set the speed keep running.
P62	Testing B		OFF	⊕ ⊖	Option of Testing B, after setting press 【060. Tv】 to set the speed execute the cycle of Start – Sewing –Stop - Trimming
P63	Testing C		OFF	⊕ ⊖	Option of Testing C, after setting press 【060. TV】 to set the speed execute the cycle of Start – Sewing –Stop without positioning function
P64	Running Time of Testing B and C	1-250	20	⊕ ⊖	Setting running time of testing B and C
P65	Stop Time of Testing B and C	1-250	20	⊕ ⊖	Setting stop time of testing B and C
P66	Machine Protection Switch Testing	0-2	1	⊕ ⊖	0: Disable, 1: Testing zero signal, 2: Testing positive signal
P67	Trimming Protection Switch Testing	ON/OFF	OFF	⊕ ⊖	OFF: Disable ON: Enable
Press and hold the [P], [S] key while the boot					
P69	Backstitch release buffer (ms)	0-500	5	⊕ ⊖	Slow release delay factor
P70	The factory Type Selection		0	⊕ ⊖	
P71	Presser foot release buffer (ms)		0	⊕ ⊖	Efforts to ease foot pressure release time
P72	The needle position correction	0-9999	0	⊕ ⊖	
P73	Under needle position correction	0-9999	0	⊕ ⊖	
P76	Backstitch output of full time (ms)	10-990	250	⊕ ⊖	
P77	Freedom sew back seam even terminate pause time (ms)	20-200	100	⊕ ⊖	
P78	The Thread Clamp release angle	10-150	100	⊕ ⊖	The positioning angle of starting clamp
P79	Clamp start action angle	160-359	270	⊕ ⊖	The positioning angle of release
P80	Shear line infeed is angle	5-359	18	⊕ ⊖	Shear line infeed is angle setting (under defined as 0 °)
P81	Afterburner Shear line angle	5-359	150	⊕ ⊖	Afterburner Shear line angle setting (under defined as 0 °)
P82	Retract angle Shear line	5-359	185	⊕ ⊖	Retract Shear line angle setting (under defined as 0 °)

3 Error Code Table :


Error Code	Problem	strategies
E1	Power Module is faulty. Abnormal over current or voltage. Resistor is damaged or F1 fuse is blown.	System will be shut down until the power resets on. Please check the power board in detail.
E2	1) When power on, detected main voltage too low 2) Connect the wrong voltage, too low.	Moto and machine will be shutting down. Please check the AC power. (Too low) Please check the main pc board.
E3	Operation Box linked to CPU interface had communication error.	Motor and machine will be shutting down. Please check the operation box.
E5	The connection of the Foot Pedal error	Motor and machine will be shutting down. Please check the connection of the Foot Pedal or the problem of it
E7	a) Bad connection at the motor connector. b) Machine locked or object stuck in the motor pulley. c) Sewing material is too thick. d) Module output is abnormal.	Motor and machine will be shutting down. Please check the motor connectors, synchronizer situation and machine situation.
E8	Manual Back-Tacking lasts for 15 sec.	Motor and machine will be shutting down until the power resets on.
E9	Synchronizer signal error.	Check the upper and lower positioning signal is normal; no locator mode automatically, and the tangent; thread wiper; the positioning and all fixed stitch sewing style features also invalid. Motor can not operate normally. (Please check the positioning signal abnormalities.)
E10	Solenoids,relays,solenoid valves overcurrent	Driver and front output module output will be fully closed. Check the solenoid valve solenoid or relay is abnormal
E12	Power is turned on without the synchronizer signal.	Motor still can run, but it automatically starts the clutch mode. All constant-stitch sewing pattern and trimmer /wiper function is invalid. Please check the synchronizer.
E13	Overheat Protection f or Power Module	Please check the connection between power module and heat sink.
E14	Encoder signal error.	Please check the encoder signal or change the encoder.
E15	Abnormal over current protection for Power Module.	System will be shut down until the power resets on. Please check the power board in detail.
E17	Trimmer switch error.	Please check the trimmer switch whether turn in the correct position.

4 Port Outline Diagram

4.1 The Name of each port

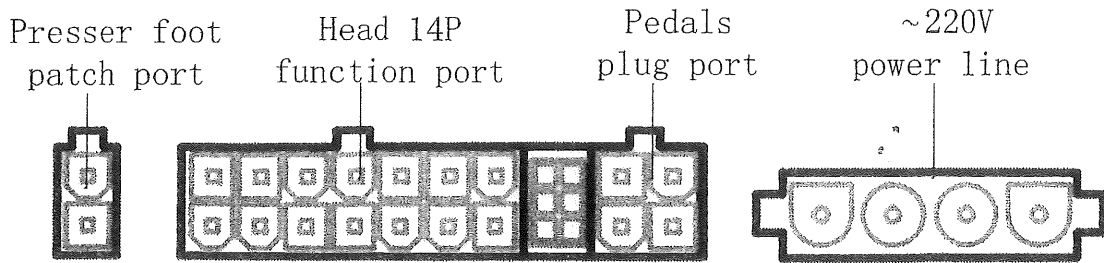

4.2 14P Function Port Table

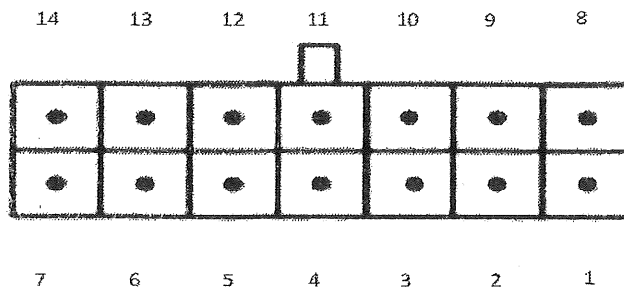

- ①Trimming Solenoid: 1、8
- ②Clamp, dial line solenoid: 2、9
- ③Clothing lights: 4 (Signal ground) 、 11 (+5v)
- ④Backstitch manually switch: 5 (Sensor signal) 、 12 (Signal ground)
- ⑤Backstitch solenoid: 6、13
- ⑥Complement Needle switch: 7 (Sensor signal) 、 14 (Signal ground)

2206RB-14-7DD
INSTRUCTION MANUAL
CONSEW USA