


CONSEW Since 1898

MODEL 289RB-2

WITH
CENTRA-LUBE® - SEMI-AUTOMATIC LUBRICATION SYSTEM
LARGE VERTICAL AXIS ROTARY HOOK AND BOBBIN
REVERSE FEED
SAFETY CLUTCH

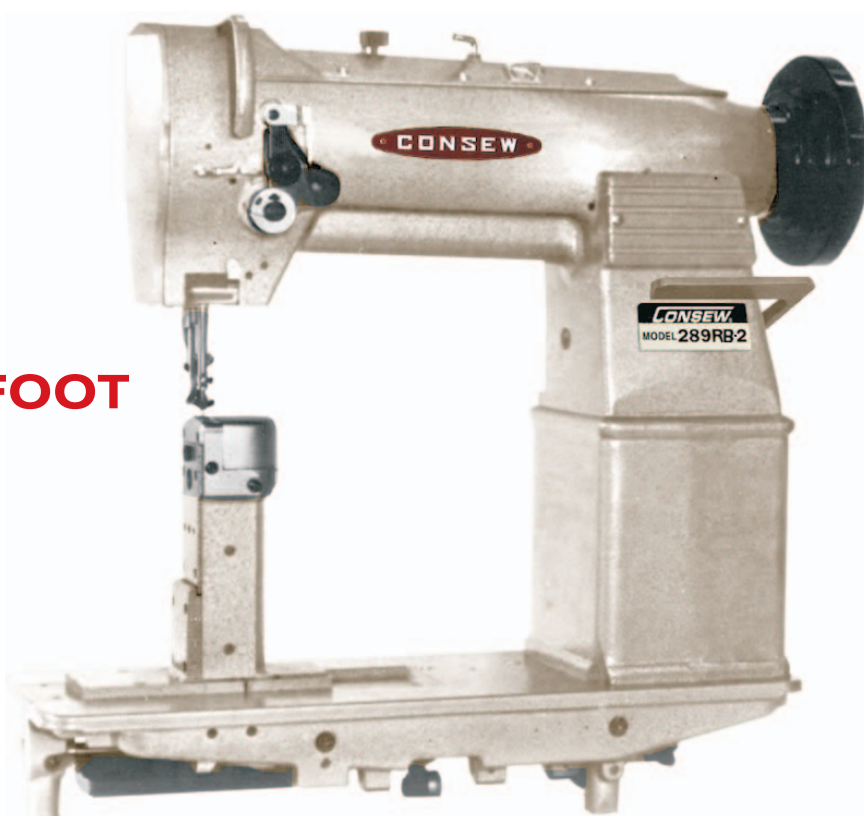

WALKING FOOT

HIGH SPEED
POST TYPE
SINGLE NEEDLE
DROP FEED, NEEDLE FEED
WALKING FOOT
ALTERNATING PRESSER FEET
LOCKSTITCH MACHINE

POST BED

Model 289RB-2

APPLICATIONS

- For sewing medium to heavy weight fabrics, leather, canvas, vinyl, synthetics and various coated and laminated materials
- For stitching uneven, hollow, tubular and curved articles
- Designed for stitching such products as boots, shoes, gloves, luggage, handbags, overalls, raincoats, bags, umbrellas, awnings, covers, tarpaulins, tents, sports and camping equipment, wearing apparel, outdoor clothing, etc.
- Suitable for edge stitching operations, and top stitching.



FEATURES

- Centra-Lube[®] semi-automatic lubrication system
- Oil fed take-up
- Safety clutch prevents the hook from being damaged
- Large bobbin allows for longer operation
- Large vertical axis hook allows for use of thick thread and therefore ornamental stitching can be obtained
- Compound feed, walking foot mechanism assures even feeding of material
- Reverse stitching
- Simple adjustment permits raising and lowering of the center foot which allows for sewing different thicknesses of material

SPECIFICATIONS

Speed, Max. (S*P.M.)	2400*
Clearance Under Foot	25/64" (10 mm)
Needle Bar Stroke	1-5/16" (33 mm)
Stitch Length, Max.	4 s.p.i. (6 mm)
Needle	135 x 17
Bobbin	Metal 15041
	Pre-wound S and U
Hook	14005
Bed Size	7" x 20 ³ / ₈ " (178 mm x 518 mm)
Work Surface	2 ¹ / ₈ " x 2" (54 mm x 51 mm)
Post Height	7" (178mm)
Stitch Type	301

* Speed depends on operation, material and thread.

POST BED