

*Since 1898*  
**CONSEW**<sup>®</sup>

# Model CN2093R

WITH

AUTOMATIC LUBRICATION

HORIZONTAL AXIS ROTARY HOOK

REVERSE FEED

ADJUSTABLE REVERSE STITCH LENGTH

COMBINATION ZIG-ZAG AND STRAIGHT STITCHER

NEEDLE POSITION ADJUSTMENT (*Right•Center•Left*)

METAL GEARS (HARDENED STEEL)



SINGLE NEEDLE

DROP FEED

**ZIG-ZAG**

LOCKSTITCH MACHINE

**APPLICATIONS**

- For sewing light to medium heavy weight fabrics including clothing, shoes and caps, leather articles, bags and more
- For attaching lace, elastic band, bottom hemming, edge stitching, butted seaming, applique and similar operations
- Federal stitch type 304

**FEATURES**


- Automatic Lubrication
- Horizontal axis rotary hook
- Dial zig-zag regulator
- Locking zig-zag width regulator
- Straight stitches when zig-zag set to "0" using straight stitch locking device
- Stitches per minute — up to 2000\*
- Reverse stitching with adjustable stitch length
- Built-in bobbin winder
- Metal gears (hardened steel)
- Built-in free-hand monogramming lever



**SPECIFICATIONS**

**CN2093R**

Speed, Max. (S.P.M.) *	2000	
Clearance Under Foot	by hand	15/64" (6 mm)
	by knee	25/64" (10 mm)
Needle Bar Stroke	1 6/25" (31.5 mm)	
Stitch Length, Max.	5 s.p.i. (5 mm)	
Needle	135 x 5	
Bed Size	7" x 15 11/16" (178 x 398.5 mm)	
Work Space	8 5/16" (211 mm)	
Stitch Width Max.	11/32" (9 mm)	
Stitch Type	•••••304 (or straight)	

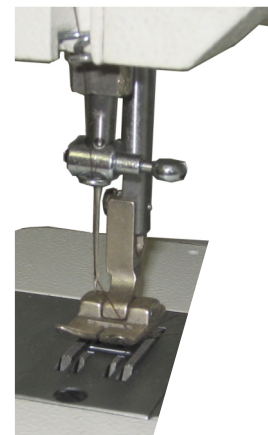

Closeup of needle adjusted to left position.

\* Speed depends on width of zig-zag, material and thread.

Type your text